


Martellina ad altezza costante e centrale

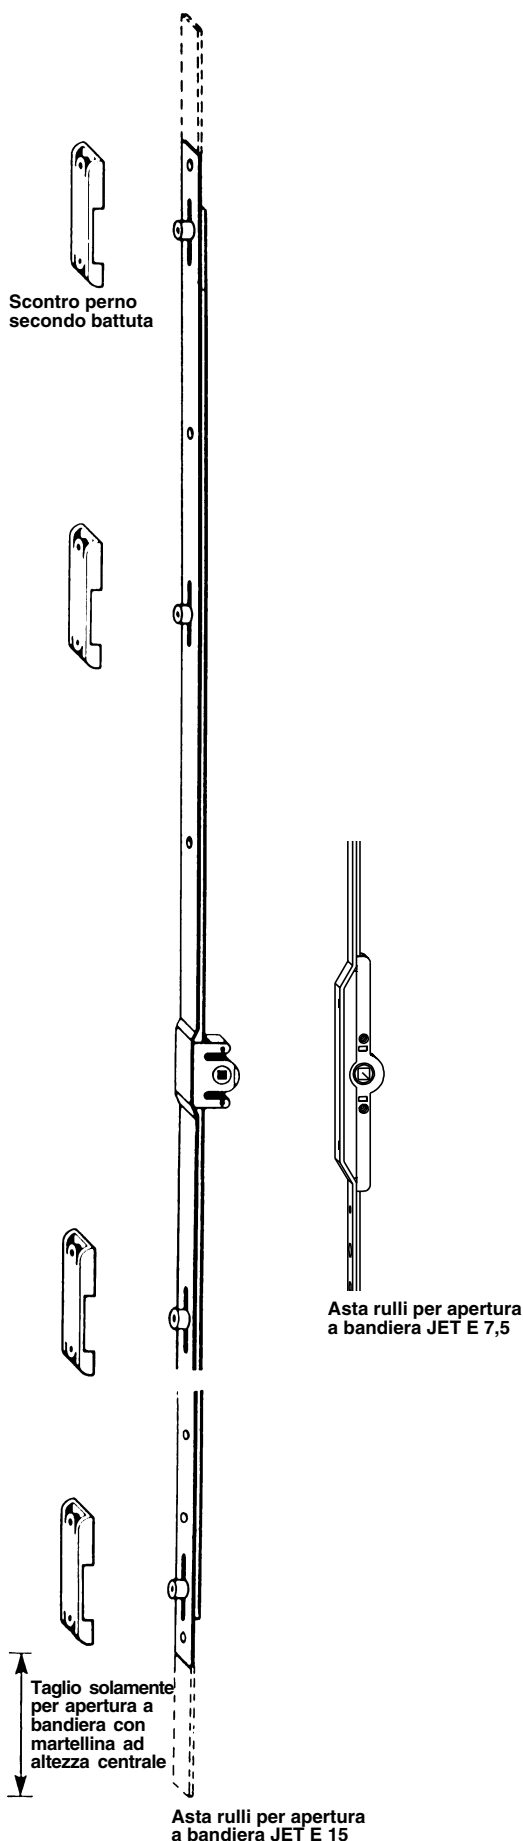

Composizione della ferramenta secondo l'altezza del battente in battuta

Quantità	Descrizione	Articolo N.	
1	Asta rulli per apertura a bandiera	Asta rulli	Asta rulli
	Martellina ad altezza costante	JET E 15	JET E 7,5
	HBB Front. PC G		
	350- 450 450 2 155	G-12425-04-0-3	G-13237-04-0-3
	451- 550 550 2 155	G-12425-05-0-3	G-13237-05-0-3
	551- 700 700 2 200	G-12425-07-0-3	G-13237-07-0-3
	701- 850 850 2 250	G-12425-08-0-3	G-13237-08-0-3
	851- 975 975 2 400	G-12425-10-0-3	G-13237-10-0-3
	976-1100 1100 3 400	G-12425-11-0-3	G-13237-11-0-3
	1101-1225 1225 3 500	G-12425-12-0-3	G-13237-12-0-3
	1226-1350 1350 3 500	G-12425-13-0-3	G-13237-13-0-3
	1351-1475 1475 3 500	G-12425-35-0-3	
	1351-1475 1475 3 600	G-12425-15-0-3	G-13237-15-0-3
	1476-1600 1600 3 500	G-12425-36-0-3	
	1476-1600 1600 3 600	G-12425-16-0-3	G-13237-16-0-3
	1601-1725 1725 3 500	G-12425-37-0-3	
	1601-1725 1725 3 600	G-12425-17-0-3	G-13237-17-0-3
	1726-1850 1850 3 500	G-12425-38-0-3	
	1726-1850 1850 3 600	G-12425-18-0-3	G-13237-18-0-3
	1851-1975 1975 4 980	G-12425-20-0-3	G-13237-20-0-3
	1976-2100 2100 4 980	G-12425-21-0-3	G-13237-21-0-3
	2101-2225 2225 4 980	G-12425-22-0-3	G-13237-22-0-3
	2226-2350 2350 4 980	G-12425-23-0-3	G-13237-23-0-3
	2101-2400 2400 4 980	G-12425-40-4-3	
1	Asta rulli per apertura a bandiera	Asta rulli	Asta rulli
	Martellina ad altezza centrale	JET E 15	JET E 7,5
	HBB Front. PC G		
	200- 400 400 1 200	G-12431-04-0-3	
	400- 600 600 2 300	G-12431-06-0-3	G-13510-06-0-3
	500- 800 800 2 400	G-12431-08-0-3	G-13510-08-0-3
	700-1000 1000 2 500	G-12431-10-0-3	G-13510-10-0-3
	900-1200 1200 3 600	G-12431-12-0-3	G-13510-12-0-3
	1100-1400 1400 3 700	G-12431-14-0-3	G-13510-14-0-3
	1300-1600 1600 3 800	G-12431-16-0-3	G-13510-16-0-3
	1500-1800 1800 3 900	G-12431-18-0-3	G-13510-18-0-3
	1700-2000 2000 3 980	G-12431-20-0-3	G-13510-20-0-3
	2101-2400 2400 4 980	G-12431-40-0-3	
1 - 4	Scontro perno		
	Scanalatura Euro 6/8 x 4 mm	8-00975-00-0-3	
	Scanalatura Euro 7/8 x 4 mm	8-00184-00-0-3	
	a incasso	8-00872-00-0-3	
	da applicare	8-00873-00-0-3	